

3% Digit Digital Ammeter and Voltmeter



SMP9635AS



SMP9635VS33




SMP9635VS34

Model	Input		Range	Auxiliary Power Supply (any one only)		Accuracy Class			Digits (max.)	Display Digit Height	
				110 / 230V AC	24 / 48 / 110 / 220V DC	0.5	1	2		3% 0.56"/14.2mm	0.8"/20mm
SMPTC/ SMP96TC	DC	TAP Position	4 - 20mA DC from Transducer to Display "01 for 4mA DC" and "02 to 99 for 20mA DC".	-	ü	-	ü	ü	-	ü	-
SMP9635AS	AC	A - 3Phase	1A or 5A (any one only),	ü	ü	ü	ü	-	ü	ü	ü
SMP9635VS33		V - 3Phase 2Element 3Wire	63.5, 110, 230, 440 or 750V (any one only),	ü	ü	ü	ü	-	ü	ü	ü
SMP9635VS34		V - 3Phase 3Element 4Wire	63.5, 110, 230, 440 or 750V (any one only),	ü	ü	ü	ü	-	ü	ü	ü

Dimensions (mm)				
Model	SMP35S / SMP35ST	SMPTC	SMP9635S / SMP9635ST	SMP96TC / SMP9635AS / SMP9635VS33 / SMP9635VS34
Front	48 x 96	48 x 96	96 x 96	96 x 96
Depth (Behind Bezel)	88	135	90	135
Panel Cut-Out	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)	92 ^(+0.8, -0.0) x 92 ^(+0.8, -0.0)	92 ^(+0.8, -0.0) x 92 ^(+0.8, -0.0)

Ordering Information : Model, Input Range, CTR / PTR (if any), Scale Display, Auxillary Supply, Accuracy Class & Display Digit Height

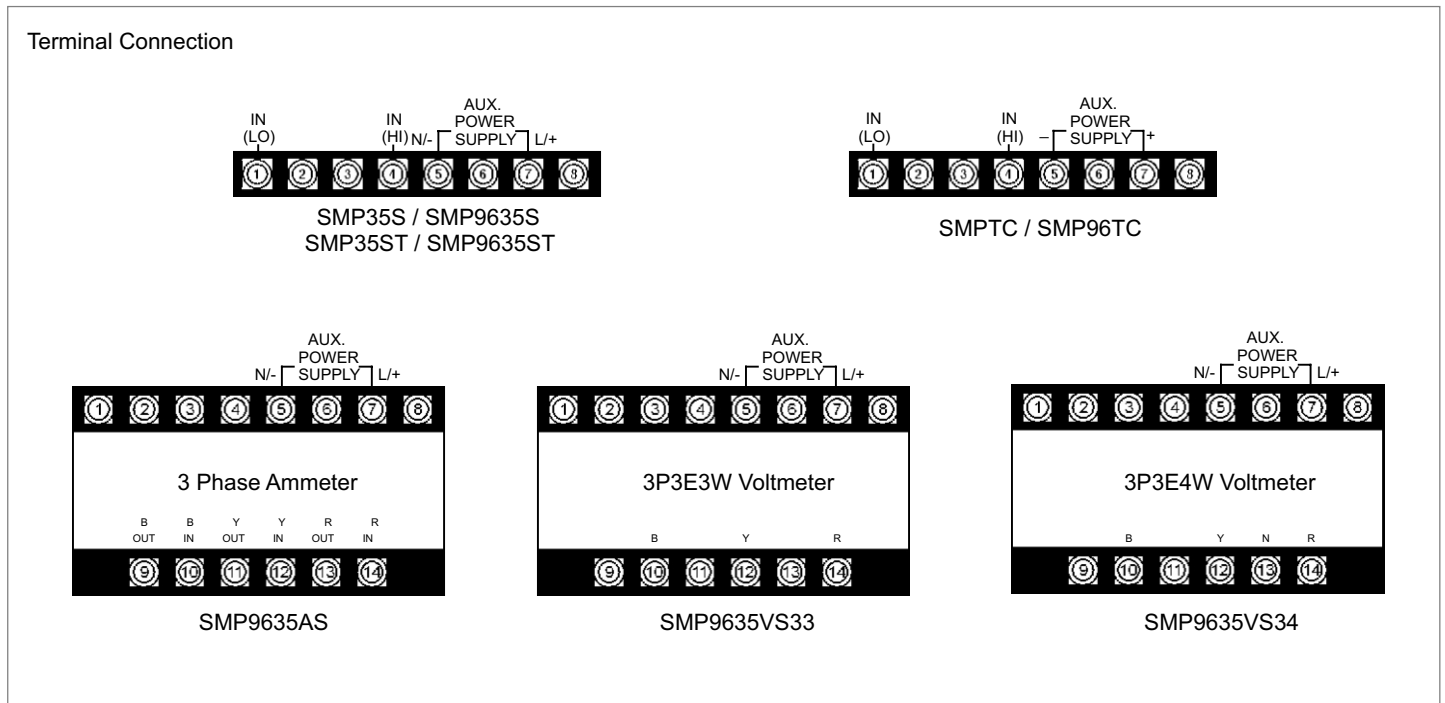

MADHU SUBTRONIC COMPONENTS PVT. LTD.

Off:- 1 st Floor, Krishna Bldg ; Shamrao Vithal Lane,

Off. Lamington Rd ; Mumbai - 400 007

Tel:- + 91 22 2380 0783/ 2386 4484/ 2387 6707, Fax:-+91 22 2387 6729

Email:-mscpl@vsnl.com ; Website:- www.mscpl.com